

# MOM2

## Micro-ohmmeter



- Up to 220 A
- Battery operated
- Handheld, lightweight – 2.2 lb (1 kg)
- Safe test – DualGround™
- Auto range: 1  $\mu\Omega$  to 1000 m $\Omega$
- Bluetooth® PC communication
- Ultra capacitor technology (patent pending)

### DESCRIPTION

The MOM2 Micro-ohmmeter is a lightweight, handheld unit designed to deliver up to 220 Amps and measure the resistance of circuit breaker contacts, bus-bar joints, and other high-current links. This product is designed with safety, ease of use and versatility in mind.

The MOM2 can be used anywhere to measure a low resistance value with high accuracy. With the MOM2, it is possible to make measurements according to the DualGround™ method. This means that the test object will be grounded on both sides throughout the test giving a safer, faster and easier workflow.

Its ruggedness and light weight make the MOM2 very suitable for field work, such as in substations. The unit comes with a strong rubber holster accessory which makes it extra durable. The MOM2 is capable of testing for a full day without recharge. It can store 190 test values and transfer test data to a PC via Bluetooth.

### High Current Generation Using Ultra Capacitor

The MOM2 uses an ultra capacitor to generate the high-output current. Ultra capacitors are able to store huge amounts of energy compared to conventional capacitors. In addition, they can deliver very high currents during discharge as a result of their very low internal resistance.

While testing, the capacitor is discharged through the test object. The voltage drop across and the current flow through the test object are continuously and synchronously sampled. The resistances calculated from the individual samples are then averaged to obtain the final value.

### APPLICATIONS

The MOM2 test system is designed to serve a number of applications. The most common are contact resistance measurements of low-, medium- and high-voltage breakers and also at bus-bar joints, and other high current links.

If the contact resistance is too high, this will lead to power loss and temperature rise, which often leads to serious trouble. To avoid such problems, it is necessary to check the resistance at regular intervals.

The following table demonstrates how important low resistance is at high currents:

Current	Contact resistance	Power loss
10 kA	1 m $\Omega$	100 kW
10 kA	0.1 m $\Omega$	10 kW
1 kA	1 m $\Omega$	1 kW
1 kA	0.1 m $\Omega$	100 W

At 10 kA a contact with the resistance 0.1 m $\Omega$  gives a power loss of 10 kW. This power loss in one single point will definitely confer a temperature rise, which may result in overheating and possibly premature failure.

**APPLICATION EXAMPLES**

**Circuit Breaker testing**


- Test of circuit breaker contacts
- Test of the connections to the breaker

**Testing of Bus-bar**

- Test of Bus-bar joints
- Test of connections

**Everywhere you need to test a low resistance/ high current connection**

- Switches
- Disconnecting devices
- Safety ground connections
- Welding points
- Fuses
- Cables

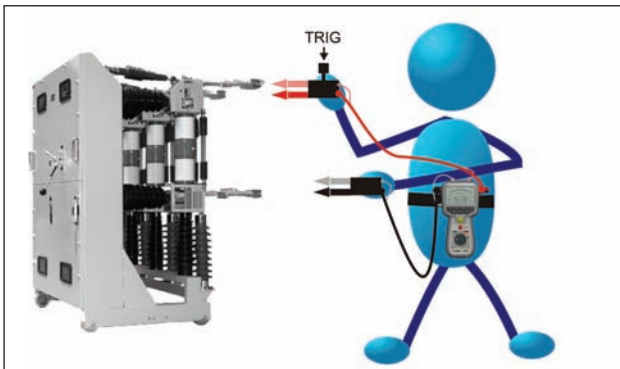

Hold probes / attach Kelvin clamps to CB and press trig / TEST button. A signal indicates whether test was pass or fail and result is logged in unit for later dump to PC.

**BOTH SIDES GROUNDED**


Within electrical power utilities, switchgear owners and service companies, there is an increased emphasis on efficiency of operations, maintenance and service levels. There is an increased emphasis on health, safety, and environmental compliance. Experience has also shown demands for shorter time periods for testing, while the switchgear is less and less available to be taken out of service.

Many utilities require safety grounds to remain in place during station outages, and the MOM2 was designed with this field safety constraint in mind. DualGround means that the test object will be grounded on both sides throughout the test giving a safer, faster and easier workflow. Minimum time is spent in the substation and focus is on the test rather than the equipment.


Conventional vs. DualGround	
Site preparation (isolate work area, apply safety ground, issue permit to work)	Site preparation (isolate work area, apply safety ground, issue permit to work)
Hook up test equipment. Issue sanction for test	Hook up test equipment. Issue sanction for test
Authorized person removes the ground	Risky step left out
Perform testing	Safe testing with both sides grounded
Authorized person applies ground	Risky step left out
Cancel sanction for test. Disconnect test equipment	Cancel sanction for test. Disconnect test equipment
Site closing (cancel permit to work, disconnect ground)	Site closing (cancel permit to work, disconnect ground)



Equipment and methods that supports DualGround™ testing are associated with the DualGround symbol. This symbol certifies the use of groundbreaking technology and methods that enables a safe, fast and easy workflow with both sides grounded throughout the test.

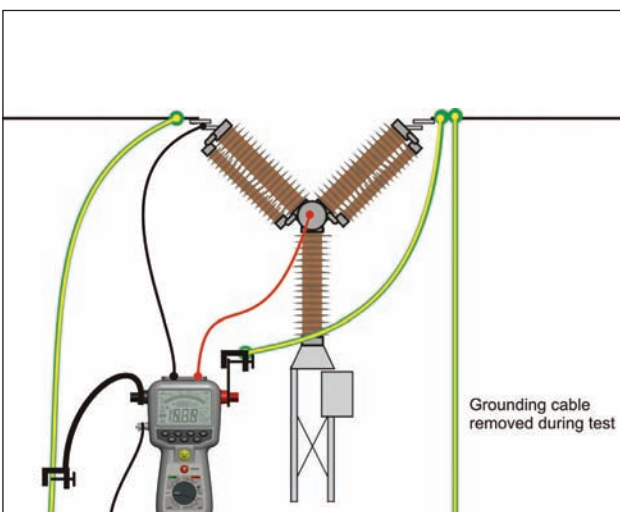

Traditional measurement from ground. Injection is done through existing grounding cable (earthing). Optional cable kit is needed. Available kits have 5, 10 or 15 m cables.

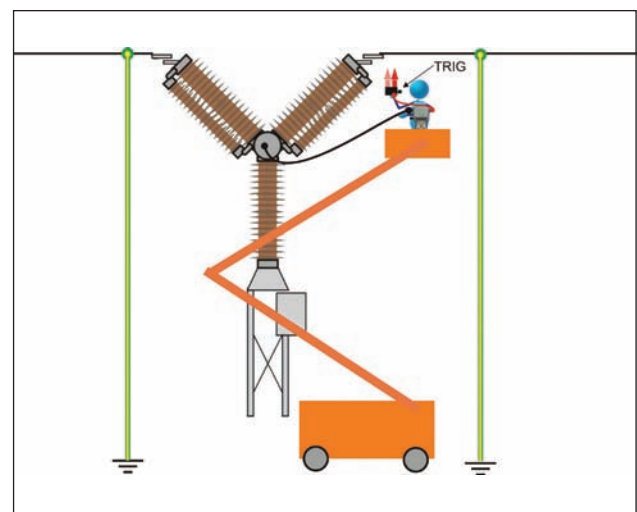

Measurement on CB with both sides grounded, DualGround.

**FEATURES AND BENEFITS**

**Handheld and lightweight**

- At 2.2 lbs (1 kg), the MOM2 is easy to use in hard-to-reach places

**High current output**

- Compliant with IEC/IEEE standards

**DualGround™ technology**

- Fast, easy and safe testing

**Battery operated**

- Convenient and portable, allows up to 2200 measurements per charge

**Bluetooth communication**

- Easily transfer data to PC

**Audible pass/fail feedback through headset**

- No need to look at the screen in tight situations

**Data logging**

- Stores a full day's results up to 190 records

**SPECIFICATIONS**

Specifications are valid at fully charged batteries and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

**Environment**

Application field For use in high-voltage substations and industrial environments.

Temperature

Operation\* -20°C to +50°C (-4°F to +122°F)

Storage -40°C to +70°C (-40°F to +158°F)

Relative humidity %RH 5%-95%, non condensing

Pollution degree 2

Shock IEC 60068-2-27

Vibration IEC 60068-2-6

Transport ISTA 2A

Flammability class V0

\*Battery operation temperature 0°C to +50° (32°F to +122°F)

\*Battery charging temperature +10°C to +40° (50°F to +104°F)

**General**

Battery power Five AA (HR6) 2700 mAh NiMH cells

Recharge time < 12 h

Typical recharge time at 25°C 3 h

Battery charger

Mains voltage 100-250 V AC, 50 / 60 Hz

Power consumption 60 W

Protection Against wrong battery type, low/high temperature

Real time clock battery life ≥10 years

Audible feedback Different buzzer sounds

User presets 3

Field calibration Yes

Encapsulation IP54

Dimensions 217 H x 92 B x 72 D mm

(excl. binding posts) 8.5 H x 3.6 B x 2.8 D in.

Weight 1.0 kg (2.2 lbs) instrument only  
5.0 kg (11 lbs) with accessories and carrying case

**CE-marking**

EMC 2004/108/EC  
LVD 2006/95/EC

**Measurement section**

Minimum current guarantee Selectable 50 A / 100 A  
Valid at resistance ≤2mΩ  
Pass / Fail Settable from 1 μΩ to 1999 mΩ  
Number of measurements on fully charged batteries typ. 2200 at I min = 50 A and 0.1 s  
typ. 800 at I min = 100 A and 0.1 s  
Interference suppression Yes  
Range 0 - 1000 mΩ  
Range selection Auto  
Resolution  
0 - 999 μΩ 1 μΩ  
1.0 - 9.99 mΩ 0.01 mΩ  
10.0 - 99.9 mΩ 0.1 mΩ  
100 - 1000 mΩ 1 mΩ  
Accuracy  
0 - 1999 μΩ ±1 % of reading ±1 digit  
2 - 1000 mΩ ±2 % of reading ±1 digit

**Outputs + / -**

Range > 100 A DC (R < 2 mΩ)  
Output voltage (max) 2.5 V DC  
Generation duration Selectable: 0.1 s, 0.6 s, 3 s

	Recovery time at I min set to 100 A and load 100 μΩ	
Generation time	Max	Typ
0.1 s	10 s	8 s
0.6 s	20 s	16 s
3 s	130 s	100 s

**Inputs**

SENSE + / -  
Connector 4 mm banana jack  
Voltage ±3 V DC  
Trigger input Threshold 8 V DC  
DC IN 12 - 24 V DC, 2 A max

**Logger**

Logger, Data Label, Timestamp, I max, I min, I Limit, Resistance, Meas.time, P/F limit

Labeling schemes Circuit breaker oriented or diary number

Capacity 190 measurements

**Wireless communication**

Headset Bluetooth  
PC communication Bluetooth


**INSTRUMENT FRONT VIEW**

1. Current output terminal (-)
2. Current output terminal (+)
3. Display
  - The display offers a combination of analog arc and a dual digital readout:
  - Analog arc:  
Indicates level of the capacitor charge.
  - Dual digital display:  
Large main digital readout for good visibility of all main measurement results  
Second digital display for additional data.
4. Ground (earth) terminal
5. Keys for navigation and to make settings in the display
6. TEST-button
7. Stand-by/Wake up (Press shortly to toggle)  
Clear log (Press and hold for 5 seconds)


**8. Function selector**

OFF		
I > I min	0.1 s	Measurement time with minimum current guarantee
	0.6 s	
	3 s	
I = I max	0.1 s	Measurement time with max. charge
	0.6 s	
	3 s	
SET	Bluetooth	Bluetooth "pair units"
	CLK	Set date and time
		Set volume for the internal loudspeaker
		Discharge the MOM2 internal capacitor
	I min	Minimum current guarantee setting
	LOG	Data log settings
	P/F	Pass/Fail settings
PC COM		PC communication (dump data to PC)
USER	1	Stored settings. Set from PC, MOM2 Win
	2	
	3	

9. Connector for the voltage (-) sense lead
10. Connector for the voltage sense (+) lead and the trig function
11. Connector for the battery charger
12. Battery charger indicator

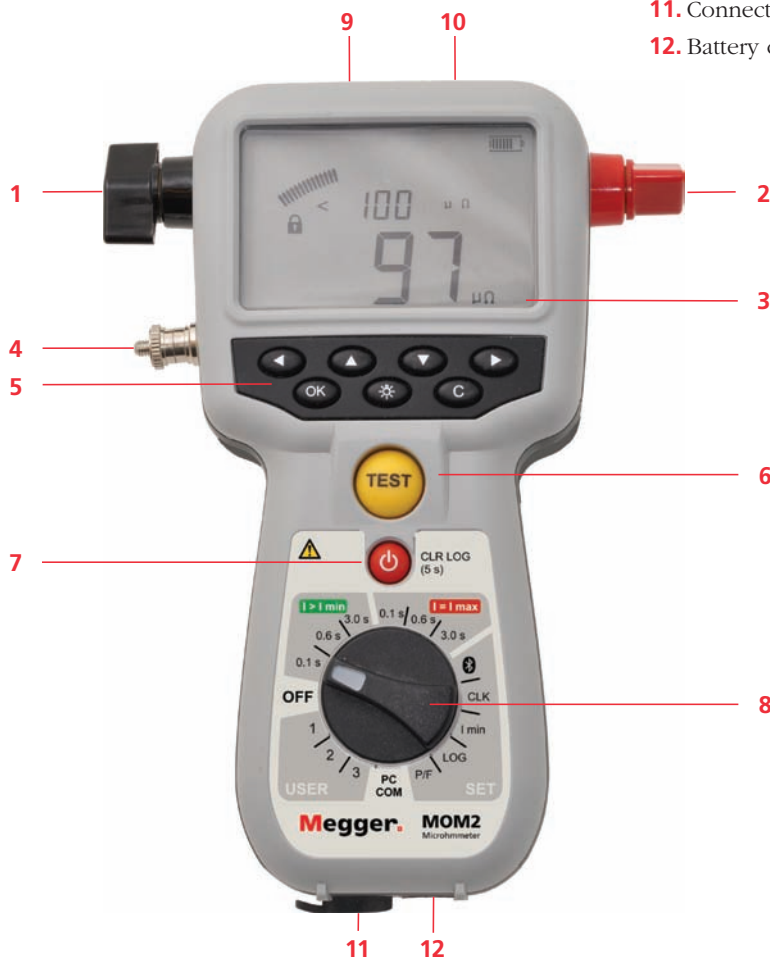

**INCLUDED ACCESSORIES**

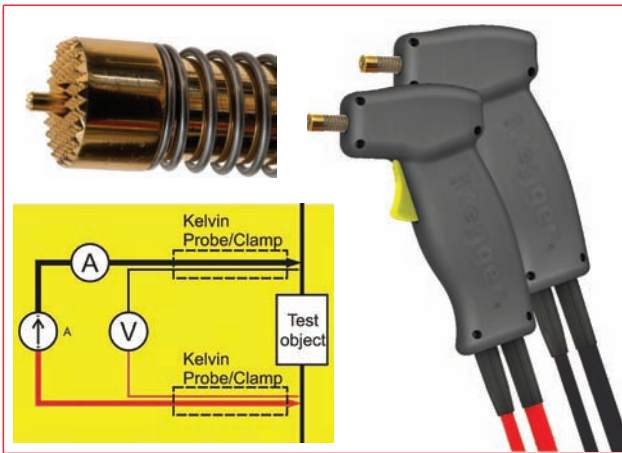

The Kelvin probes (included in BD-59090) are used for a 4-wire Kelvin test. This is a way of measuring continuity resistances ensuring all contact and lead resistances are compensated for, allowing a much greater accuracy in measurements. Each Kelvin probe assembly has two probe tips: one tip is for the current generated; the other will measure the very small voltage present. The Kelvin clamps (included in BD-59092) use the same principle.

**OPTIONAL ACCESSORIES**



Bluetooth headset



Bluetooth dongle



Connection plate, used together with the cable kits.



MOM2 shown with transport case, charger, rubber holster, carrying strap, belt clip, MOM2 Win software.

**ORDERING INFORMATION**

Item	Cat. No.
MOM2 Micro-ohmmeter including: 2 x 1.3 m (4 ft) test cables Kelvin probes (one with trig button) transport case, charger, rubber holster, carrying strap, belt clip, MOM2 Win	BD-59090
MOM2 Micro-ohmmeter including: 1.3 m (4 ft) test cable red with Kelvin clamp 3 m (10 ft) test cable black with Kelvin clamp C/N GA-90001, transport case, charger, rubber holster, carrying strap, belt clip, MOM2 Win	BD-59092
<b>Optional Accessories</b>	
<b>Test cables with Kelvin probes 2 x 1.3 m (4 ft) (one with trig button)</b>	<b>GA-90000</b>
<b>Test cables with Kelvin clamps 1.3 m (4 ft) red, 3 m (10 ft) black</b>	<b>GA-90001</b>
<b>Cable kit 5 m</b> Current cable 0.5 m (1.6 ft), connection plate and sense cables 5 m (16 ft), ground cable	GA-00380
<b>Cable kit 10 m</b> Current cable 0.5 m (1.6 ft), connection plate and sense cables 10 m (33 ft), ground cable	GA-00382
<b>Cable kit 15 m</b> Current cable 0.5 m (1.6 ft), connection plate and sense cables 15 m (49 ft), ground cable	GA-00384
<b>Bluetooth kit</b> Headset and dongle for PC	XC-06000
Calibration kit	BD-90002

**UNITED STATES**  
Megger  
2621 Van Buren Avenue  
Norristown, PA 19403 USA  
T +610-676-8500  
T +866-254-0962  
F +610-676-8625

**SWEDEN**  
Megger Sweden AB  
Eldarvägen 4, Box 2970  
SE-187 29 TÄBY  
T +46 8 510 195 00  
F +46 8 510 195 95  
E seinfo@megger.com

**Other Technical Sales Offices**  
Dover UK, Dallas USA, College Station USA, Sydney AUSTRALIA, Ontario CANADA, Trappes FRANCE, Oberursel GERMANY, Aargau SWITZERLAND, Kingdom of BAHRAIN, Mumbai INDIA, Johannesburg SOUTH AFRICA, and Chonburi THAILAND

Registered to ISO 9001 and 14001  
Subject to change without notice.  
MOM2\_DS\_US\_V07  
www.megger.com  
Megger is a registered trademark