


The major parts of Z-560 series pipe flowmeter: material of taper tube is polysulfone(PSU), the connectors are polyvinyl chloride(PVC), the float material is PVDF, can be acid proof and alkali-resisting.


- Max. working pressure: 10Bar
- Temperature limit: 100°C
- Accuracy: ± 5%
- O-ring material: EPDM
- Float: Poly(Vinylidene fluoride)

#### Specification


Model	Water		Pipe Connection	Thread (Male)	Thread (Female)	Elbow (W)
	(GPM)	(LPM)				
Z-5615	0.25~2.5 0.7~7 1~11	1~10 2.5~25 4~40	ø20	3/4"NPT 1/2"NPT	1/2"NPT 1/2"BSP	1/2"NPT 1/2"BSP
Z-5625	1~10 1.2~12 1.5~15	4~40 5~50 6~60	ø32	3/4"NPT	3/4"NPT 3/4"BSP	3/4"NPT 3/4"BSP
Z-5632	1.5~15 1.8~18 2~20	6~60 7~70 8~80	ø40	1"NPT	1"NPT 1"BSP	1"NPT 1"BSP
Z-5650	2.5~25 5~50 8~80	10~100 20~200 30~300	ø63	2"NPT	2"NPT 2"BSP	2"NPT 2"BSP

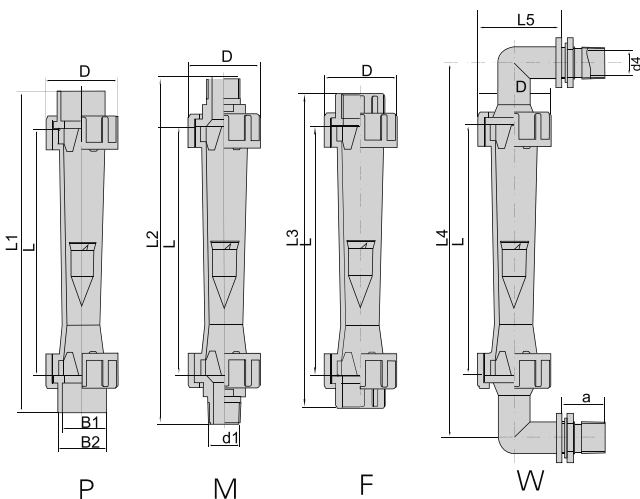

#### Ordering

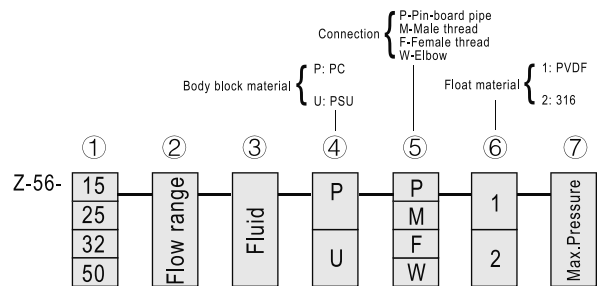

Illustrative example



\* Refer to "Ordering" and "Illustrative example" when placing an order or requesting a quotation. Fill in the blanks in the "Order/Quotation Request Card" at the end of the catalog, and send the card by fax.

Unit (mm)

Model	L	D	Metric Union (P)			Male Thread (M)	Female Thread (F)	Elbow (W)				Weight (kg)
			L1	B1	B2	L2	L3	L4	a	L5	d4	
Z-5615	170	50	217	20	26	236	216	247	25	56.5	ø13	0.4
Z-5625	199	59	255	32	39	281	254	297	25	83	ø20	0.5
Z-5632	249	72	310	40	49	338	315	357	31	95	ø25	1
Z-5650	290	120	375	63	73	400	370	440	40	120	ø45	3